

WARP LET-OFF CONTROL UNIT UKAST

DESIGNED FOR ADJUSTED WARP TENSION CONTROL

OVERVIEW

The UKAST is the revised let-off controller of the well-known KAST 197. It can be used as replacement of KAST 197 but with its new design it allows a wider applications.

The controller is designed for application of warp tension control for weaving machines and comes standard without a driver. It just gives a motor speed analog-output of 0-10VDC for external driver.



KEY ADVANTAGES

- simple handling
- maintenance-free
- customized adaptation of let-off device with gear combination
- various parameter programming for quality optimization
- higher fabric quality



Save resources. Print responsibly.



Agrotech



Buildtech



Clothtech



Geotech



Hometech



Indutech



Medtech



Mobiltech



Oekotech




Packtech



Protech



Sporttech

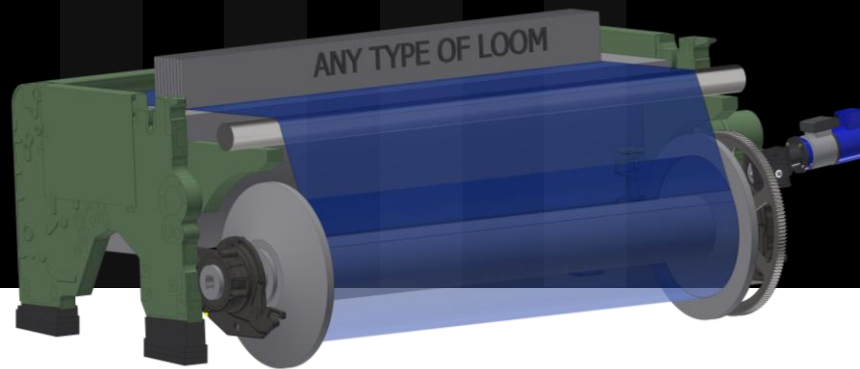

UNIVERSAL UTILIZATION

The UKAST is the revised let-off controller of the well-known KAST 197. It can be used as replacement of KAST 197 but with its new design it allows a wider applications.

UKAST, this name stands for the really universal utilization.

The controller is designed for application of warp tension control for weaving machines and comes standard without a driver. It just gives a motor speed analog-output of 0-10VDC for external driver.

Depending on the application various motor drivers and motor sizes are available which supplies the necessary warp threads to the weaving machine and maintain the yarn tension constant from full to empty beam. The warp thread tension is measured by a linear proximity sensor fitted to the back rest roller. The control system is equipped with dozens of function parameters, which allow an optimal adaptation to the most diverse types of fabric and weaving machines. If fine adjustments are needed, these can be made whilst the machine is running.

AVAILABLE OPTIONS

EXTERNAL CONTROLE PANEL

With the external control it is possible to control the device directly from the position of the weaver. This means that the user can operate the control remotely without having to be directly near the device.

CONFIGURATION WITH LAPTOP

To reviewing and fine tuning the required parameters, we can provide you with a laptop that is already equipped with the necessary software. This laptop allows you to make all relevant settings precisely and ensure that the parameters are set correctly.

crealet

■ CUSTOMIZED WARP SYSTEMS



Agrotech



Buildtech



Clothtech



Geotech



Hometech



Indutech



Medtech



Mobiltech



Oekotech




Packtech



Protech



Sporttech

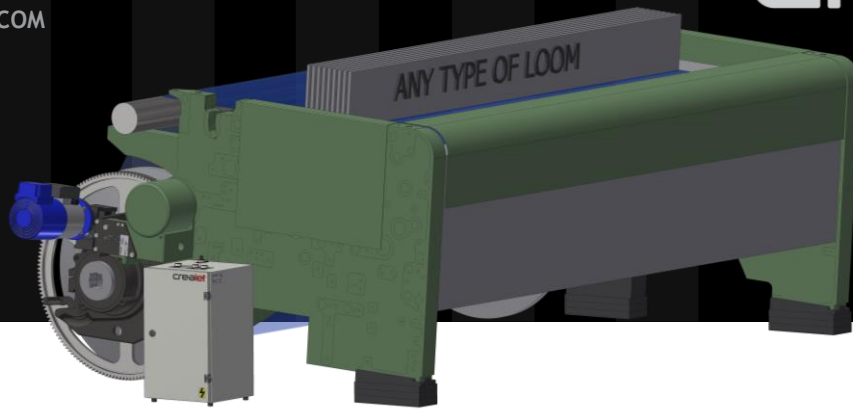

MODES AND OPERATION

WEAVING MODE

As soon as a machine run signal between 10-48 VAC/DC is available, the control system is in weaving mode. During this process the let-off keeps the position of the back rest roller to its reference setting and thus the warp thread tension remains constant. The position of the back rest roller is measured by a linear proximity sensor. If the weaving machine run signal is set back, the let off speed is memorized.

SLOW MOTION MODE

As soon as there is a signal between 10- 48 VAC/DC available, the control system is in slow motion mode. During operation in slow motion, the warp let-off moves at a speed proportional to the let-off speed memorized at last. The factor of proportionality can be set by means of a parameter.

FUST FUNCTION MODE

If the two keys for manual operation are pushed simultaneously, the whip roller moves to its reference setting even when weaving machine is not running.

PICK FINDING MODE

Pick finding mode can be selected from an external position. Electronic pick finding is done independent from the weaving machine.

MANUAL OPERATION

The warp beam can be wound and unwound by hand with two keys.

LET US CREATE TOGETHER THE
SOLUTION FOR PRECISE WARP TENSION
AND SUPERIOR TEXTILE QUALITY!



✚ CUSTOMIZED WARP SYSTEMS



Agrotech



Buildtech



Clothtech



Geotech



Hometech



Indutech



Medtech



Mobiltech



Oekotech



Packtech



Protech



Sporttech